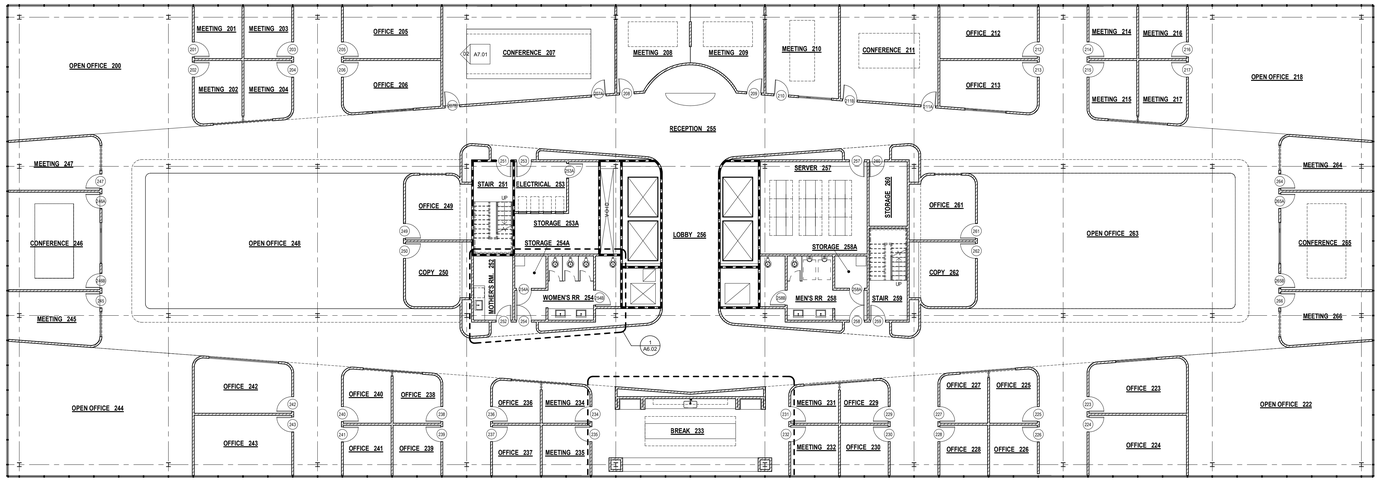

OFFICE PROJECT

APPLICABLE CODES

PROJECT SHALL COMPLY WITH:
2011 L.A. AMENDMENT BUILDING CODE
2011 L.A. AMENDMENT GREEN BUILDING CODE
2011 L.A. AMENDMENT ELECTRICAL CODE
2011 L.A. AMENDMENT MECHANICAL CODE
2011 L.A. AMENDMENT PLUMBING CODE
2008 L.A. AMENDMENT ELEVATOR CODE

BUILDING INFORMATION

NUMBER OF STORIES
25 FLOORS

TYPE OF CONSTRUCTION
TYPE III-B NON RATED, FULLY SPRINKLERED (NO CHANGE PROPOSED)
FIRE SPRINKLER DESIGN SHALL BE EXTRA HAZARD, GROUP 2 PER CFC 4805.2

USE
OFFICE
(NO CHANGE PROPOSED)

OCCUPANCY GROUP CLASSIFICATION
MAJOR USE: COMMERCIAL OFFICE
ACCESSORY/SUPPORT USES: OFFICE

#	SHEET NAME	FIRST SHEET ISSUE: SD/CONTRACTOR PRICING	DD/CONTRACTOR PRICING	PLAN CHECK SUBMITTAL	XX.XX.XX	XX.XX.XX
ARCHITECTURE						
A1.01	SITE PLAN					
A2.2.1	LEVEL 02 FLOOR PLAN					
A2.2.2	LEVEL 02 FINISH FLOOR PLAN					
A2.2.3	LEVEL 02 REFLECTED CEILING PLAN					
A2.6.1	ROOF PLAN					
A6.01	ENLARGED PLANS					
A6.02	ENLARGED PLANS					
A7.01	INTERIOR ELEVATIONS					
A8.01	DOOR SCHEDULE					
ELECTRICAL						
E2.02	ELECTRICAL PLAN - LEVEL 2					
GENERAL						
G0.00	COVER SHEET					
G0.01	ACCESSIBILITY DETAILS	■	■	■	■	
MECHANICAL						
M2.02	MECHANICAL LAYOUT - LEVEL 2					
PLUMBING						
P2.02	PLUMBING - LEVEL 2					
STRUCTURAL						
S2.02	LEVEL 02 FRAMING PLAN					

GENERAL NOTES

1. INTERPRETATION OF DRAWINGS AND DOCUMENTS: EACH CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS AT THE PROJECT SITE BEFORE EXECUTING ANY WORK AND SHALL NOTIFY THE OWNER AND THE ARCHITECT OF ANY DISCREPANCIES BEFORE PROCEEDING. THE ARCHITECT SHALL BE NOTIFIED OF ANY UNUSUAL OR UNFORESEEN CONDITIONS OR SITUATIONS WHICH MAY AFFECT THE STRUCTURAL INTEGRITY OR SAFETY OF THE PROJECT.

2. ADHERENCE TO PLANS: STRICT ADHERENCE TO THE CONSTRUCTION DOCUMENTS MUST BE MAINTAINED. NO CHANGES SHALL BE MADE IN THE PROJECT WHICH DEVIATE FROM THE PLANS AND SPECIFICATIONS WITHOUT THE WRITTEN CONSENT OF THE OWNER. NO STRUCTURAL CHANGES SHALL BE MADE WITHOUT THE WRITTEN CONSENT OF THE ARCHITECT.

3. WORKING DRAWING: FIGURED DIMENSIONS AND DETAILED DRAWINGS SHALL BE FOLLOWED IN PREFERENCE TO SCALE MEASUREMENTS. IN CASE OF ANY DOUBT ON THE PART OF THE CONTRACTOR AS TO THE EXACT MEANING OF THE DRAWINGS AND THESE SPECIFICATIONS, HE SHALL APPLY TO THE ARCHITECT FOR AN INTERPRETATION BEFORE PROCEEDING WITH HIS WORK.

4. SHOP DRAWINGS: CONTRACTOR SHALL SUBMIT COPIES OF ALL SHOP DRAWINGS FOR REVIEW BY ARCHITECT PRIOR TO CONTRACTOR'S APPROVAL FOR CONSTRUCTION.

5. THE CONTRACTOR SHALL PROVIDE ALL SHORING AND BRACING REQUIRED TO PROTECT PERSONNEL AND ADJACENT PROPERTY AND TO INSURE SAFETY OF THE PROJECT WORK.

6. WHEREVER IN THESE DRAWINGS ANY MATERIAL OR PROCESS IS INDICATED, IT IS FOR THE PURPOSE OF FACILITATING DESCRIPTION OF THE MATERIAL OR PROCESS DESIRED. THE CONTRACTOR MAY OFFER ANY MATERIAL OR PROCESS WHICH SHALL BE DEEMED EQUIVALENT BY THE ENGINEER AND THE ARCHITECT TO THAT MATERIAL OR PROCESS INDICATED OR SPECIFIED.

7. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE NEW AND BOTH WORKMANSHIP AND MATERIALS SHALL BE THE BEST OF THEIR RESPECTIVE KINDS. THE CONTRACTOR SHALL, IF REQUIRED, FURNISH SATISFACTORY EVIDENCE AS THE KIND AND QUALITY OF MATERIALS.

8. IT SHALL BE THE DUTY OF THE GENERAL CONTRACTOR TO SEE THAT ALL SUB-CONTRACTORS ARE FULLY INFORMED IN REGARD TO THE GENERAL CONDITIONS AND PRELIMINARY SPECIFICATIONS.

B. PERMITS AND REGULATIONS

1. EACH CONTRACTOR SHALL PAY FOR AND OBTAIN ALL PERMITS REQUIRED BY LOCAL AUTHORITIES BEFORE PROCEEDING WITH HIS RESPECTIVE INSTALLATION AND SHALL ARRANGE AND PAY FOR ANY INSPECTIONS AND EXAMINATIONS REQUIRED BY THOSE AUTHORITIES.

2. ALL WORKMANSHIP AND MATERIALS SHALL CONFORM TO THE CURRENT EDITION OF THE UNIFORM BUILDING CODE, AND LAWS, ORDINANCES AND REGULATIONS OF ALL GOVERNMENTAL BODIES WITH JURISDICTION OVER THE PROJECT.

3. IF THE DRAWINGS AND SPECIFICATIONS ARE AT VARIANCE WITH ANY FEDERAL, STATE AND LOCAL OR MUNICIPAL LAW, ORDINANCE, RULES OR DEPARTMENTAL REGULATIONS, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IN WRITING BEFORE PROCEEDING WITH THAT WORK. IF ANY OF THE CONTRACTOR'S WORK SHALL BE DONE CONTRARY THERETO WITHOUT SUCH NOTICE HE SHALL BEAR ALL COST ARISING THEREFROM.

C. PROTECTION OF WORK & PROPERTY

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL VIOLATIONS OF CITY ORDINANCES AND STATE LAWS INVOLVED IN THE PERFORMANCE OF HIS WORK. HE SHALL PROVIDE, DURING THE PROGRESS OF HIS WORK, EVERY AND ALL SAFEGUARDS AND PROTECTION AGAINST ACCIDENTS, INJURY AND DAMAGE TO PERSONS AND PROPERTY INCLUDING ADJOINING PROPERTY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR HIS WORK AND EVERY PART THEREOF, AND FOR ALL MATERIALS, TOOLS, APPLIANCES AND PROPERTY OF EVERY DESCRIPTION USED IN CONNECTION THEREWITH.

2. THE CONTRACTOR ASSUMES ALL RISKS, HAZARDS AND CONDITIONS IN CONNECTION WITH THE PERFORMANCE OF THE CONTRACT, AND EVEN IF THE PERFORMANCE OF THE CONTRACT INVOLVES A GREATER EXPENDITURE OF MONEY THAN THE CONTRACTOR EXPECTED AT THE TIME OF BIDDING, NO ALLOWANCE WILL BE MADE ON ACCOUNT THEREOF, AND THE CONTRACTOR SHALL CONTINUE WITH AND COMPLETE THE WORK.

D. SUPERVISION

1. THE CONTRACTOR SHALL GIVE PERSONAL SUPERVISION TO THE WORK, USING HIS BEST SKILL AND ATTENTION, AND SHALL KEEP A COMPETENT FOREMAN AND NECESSARY ASSISTANTS CONSTANTLY ON THE SITE. THE FOREMAN SHALL BE THE PERSONAL REPRESENTATIVE OF THE CONTRACTOR AND ALL DIRECTIONS GIVEN BY HIM SHALL BE AS BINDING AS IF GIVEN BY THE CONTRACTOR. COMMUNICATION DELIVERED TO THE FOREMAN BY THE ARCHITECT SHALL BE AS BINDING AS IF DELIVERED TO THE CONTRACTOR.

E. DAMAGES IN THE WORK

1. THE OWNER, WITHOUT INVALIDATING THE CONTRACT, MAY ALTER BY ADDING TO OR DEDUCTING FROM THE WORK COVERED IN THE CONTRACT. ALL SUCH WORK SHALL BE EXECUTED UNDER THE CONDITIONS OF THE ORIGINAL CONTRACT EXCEPT THAT NO EXTRA WORK OR CHANGES SHALL BE DONE WITHOUT WRITTEN ORDER FROM THE ARCHITECT. SUCH ORDERS SHALL COVER THE AGREED PRICE AND TERMS OF EXTRA WORK OF CHANGES, IF WORK IS TO BE OMITTED, THEN PROPER CREDIT FOR SUCH OMITTED WORK SHALL BE GIVEN THE OWNER.

F. CLEANING BUILDING AND PREMISES

1. PRIOR TO THE COMPLETION OF THE WORK, THE CONTRACTOR SHALL THOROUGHLY CLEAN THE EXTERIOR AND INTERIOR OF THE BUILDING, INCLUDING FIXTURES, EQUIPMENT, FLOORS AND HARDWARE, REMOVING ALL PLASTER SPOTS. STAINS, PAINT SPOTS AND ACCUMULATED DUST AND DIRT. THIS SHALL INCLUDE THOROUGH CLEANING OF ALL ROOFS, WINDOW SILLS AND LEDGES, HORIZONTAL PROJECTIONS, STEPS, RAILS, SIDEWALKS OR OTHER SURFACES WHERE DEBRIS MAY HAVE COLLECTED. WASH AND POLISH ALL GLASS.

G. GUARANTEES

1. EXCEPT AS OTHERWISE SPECIFIED, ALL WORK SHALL BE GUARANTEED IN WRITING BY THE CONTRACTOR AGAINST DEFECTS RESULTING FROM DEFECTIVE MATERIALS, POOR WORKMANSHIP OR FAULTY EQUIPMENT, FOR A PERIOD OF ONE YEAR FROM THE DATE OF FILING THE NOTICE OF COMPLETION AND THE ACCEPTANCE OF THE BUILDING BY THE OWNER. IF WITHIN THE GUARANTEE PERIOD CORRECTION OF FAULTY MATERIALS OR WORKMANSHIP IS NECESSARY IN THE OPINION OF THE OWNER, THE CONTRACTOR SHALL PROMPTLY, UPON RECEIPT OF NOTICE FROM THE OWNER AND WITHOUT EXPENSE TO THE OWNER, CORRECT FAULTY MATERIALS OR WORKMANSHIP.

H. VERIFICATION OF UNDERGROUND UTILITY IMPROVEMENTS

1. WHEN APPLICABLE THE GENERAL CONTRACTOR SHALL PROVIDE THE OWNER WITH AN AS-BUILT DRAWING LOCATING AND DESCRIBING ALL UNDERGROUND UTILITIES
LOCATED ON THE SITE, INCLUDING BUT NOT LIMITED TO THE FOLLOWING: GAS LINES,
WATER LINES, SANITARY SEWERS, TELEPHONE LINES, AND ELECTRIC LINES.

I. TRANSPORTATION OF EXCAVATED MATERIAL

1. WHEN APPLICABLE, THE CONTRACTOR SHALL TRANSPORT ALL EXCAVATED MATERIAL
NOT REQUIRED FOR RE-COMPACTION TO AN APPROVED LANDFILL SITE OUTSIDE THE COASTAL ZONE. PROVIDE TRIP TICKETS FOR ALL EXCAVATED MATERIAL REMOVED FROM THE PROJECT.

SYMBOLS

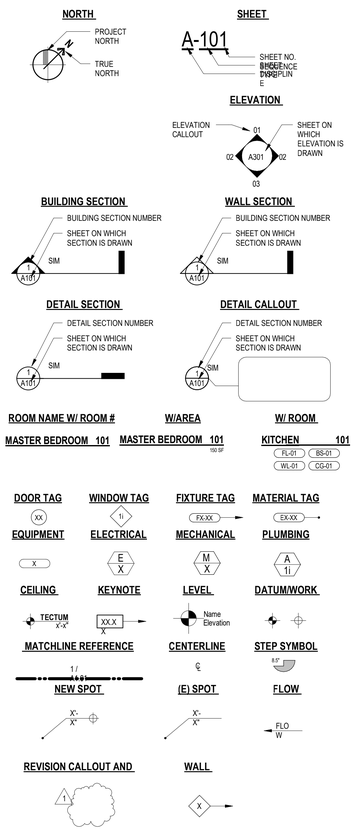

ABBREVIATIONS

&	AND	FL	FLOOR	PT	POINT
@	AT	FLASH	FLASH(ING)	PTDF	PRESSURE TREATED DOUGLAS FIR
A/C	AIR CONDITIONER / CONDITIONING	FLUOR	FLUORESCENT	Q	QUARTZ
AB	ANCHOR BOLT	FOC	FACE OF CONCRETE	QT	QUARRY TILE
ABV	ABOVE	FOF	FACE OF FINISH	QTY	QUANTITY
AC	ASPHALTIC CONCRETE	FOM	FACE OF MASONRY	R	RISER
AD	AREA DRAIN	FOP	FACE OF PLYWOOD	RAD	RADIUS
ADA	AMERICANS WITH DISABILITIES ACT	FOS	FACE OF STUDS	RCP	REFLECTED CEILING PLAN
ADJ	ADJUSTABLE / ADJACENT	FOW	FACE OF WALL	RD	ROOF DRAIN
AFF	ABOVE FINISHED FLOOR	FP	FIREPROOF; FIREPLACE	REF	REFERENCE; REFRIGERATOR
AFG	ABOVE FINISHED GRADE	FT	FOOT OR FEET	REG	REGISTER
AFS	ABOVE FINISHED SLAB	FTG	FOOTING	REINF	REINFORCE(D)
AL / ALUM	ALUMINUM	FURR	FURRING	REQ	REQUIRED
ALT	ALTERNATE	GA	GAUGE	REV	REVISE / REVISION
ANOD	ANODIZED	GALV	GALVANIZE(D)	RFL	REFLECTED
AP	ACCESS PANEL	GC	GENERAL CONTRACTOR	RH	RIGHT HAND; ROUND HEAD
APPRO X	APPROXIMATELY	GL	GLASS / GLAZING	RM	ROOM
ARCH	ARCHITECT(URAL)	GR	GRADE	RO	ROUGH OPENING
ASPH	ASPHALT	GYP	GYPSUM	RWD	REDWOOD
ASTM	AMERICAN SOCIETY FOR TESTING MATERIALS	GYP BD	GYPSUM BOARD	S	SOUTH
AUTO	AUTOMATIC	HB	HOSE BIB	SCHED	SCHEDULE
AVG	AVERAGE	HDR	HEADER	SD	STORM DRAIN
BD	BOARD	HDWR	HARDWARE	SECT	SECTION
BET	BETWEEN	HOR / HORIZ	HORIZONTAL	SF	SQUARE FEET
BLDG	BUILDING	HP	HIGH POINT; HORSEPOWER	SHT	SHEET
BLK	BLOCK	HR	HANDRAIL; HOUR	SHTG	SHEATHING
BLKG	BLOCKING	HT	HEIGHT	SHWR	SHOWER
BN	BOUNDARY NAILING	HTR	HEATER	SIM	SIMILAR
BOT	BOTTOM	HVAC	HEATING / VENTILATION / AIR CONDITIONING	SMACN	RE: THE ARCH SHEET METAL MANUAL
CAB	CABINET	HW (R)	HOT WATER (RETURN)	SOG	SLAB ON GRADE
CB	CATCH BASIN	ID	INSIDE DIAMETER	SPEC	SPECIFY / SPECIFICATION
CF	CUBIC FOOT	IN	INCH / INCHES	SQ	SQUARE
CI	CAST IRON;CONTRACTOR INSTALLED	INCL	INCLUDE(D) / INCLUDING	SQFT	SQUARE FEET
CIP	CAST IN PLACE	INSUL	INSULATE / INSULATION	SQIN	SQUARE INCH(ES)
CJ	CONTROL JOINT; CEILING JOIST	INT	INTERIOR	SS	STAINLESS STEEL
CL	CENTER LINE	JT	JOINT	ST	STONE
CLG	CEILING	LAM	LAMINATE(D)	STD	STANDARD
CLOS	CLOSET	LAV	LAVATORY	STL	STEEL
CLR	CLEAR	LB	LAG BOLT	STOR	STORAGE
CMU	CONCRETE MASONRY UNIT	LB(S)	POUND(S)	STRUCT	STRUCTURE / STRUCTURAL
CO	CLEAN;CLEAR OUT	LF	LINEAR FOOT (FEET)	SUSP	SUSPENDED
COL	COLUMN	LH	LEFT HAND	SYM	SYMMETRICAL
CONC	CONCRETE	LIB	LIBRARY	SYN	SYNTHETIC
CONST	CONSTRUCTION	LP	LOW POINT	SYS	SYSTEM
CONT	CONTINUOUS	LT	LIGHT	T&B	TOP AND BOTTOM
CORR	CORRIDOR	LVR	LOUVER	T&G	TONGUE AND GROOVE
CSK	COUNTERSINK	MACH	MACHINE	TBD	TO BE DETERMINED
DBL	DOUBLE	MAINT	MAINTENANCE	TBS	TO BE SELECTED
DEMO	DEMOLISH; DEMOLITION	MAS	MASONRY	TEL	TELEPHONE
DF	DOUGLAS FIR	MATL	MATERIAL	TEMP	TEMPORARY / TEMPERATURE
DIA	DIAMETER	MAX	MAXIMUM	THK	THICK
DIAG	DIAGONAL	MB	MACHINE BOLT	THRU	THROUGH
DIM	DIMENSION	MECH	MECHANICAL	TOC	TOP OF CONCRETE
DIV	DIVISION	MEMB	MEMBRANE	TOS	TOP OF SLAB
DN	DOWN	MEZZ	MEZZANINE	TOW	TOP OF WALL
DS	DOWNSPOUT	MFR	MANUFACTURE(R)	TV	TELEVISION
DWG	DRAWING	MIN	MINIMUM	TYP	TYPICAL
(E)	EXISTING	MISC	MISCELLANEOUS	UL	UNDERWRITERS LABORATORY
E	EAST	MR	MOISTURE RESISTANT	UNF / UNFIN	UNFINISHED
EA	EACH	MTL	METAL	UNO	UNLESS NOTED OTHERWISE
EJ	EXPANSION JOINT	(N)	NEW	UON	UNLESS OTHERWISE NOTED
EL	ELEVATION	N	NORTH	UPS	UNINTERRUPTIBLE POWER SUPPLY
ELEC	ELECTRICAL	NA OR N/A	NOT AVAILABLE / APPLICABLE	V	VOLT
ELEV	ELEVATOR	NIC	NOT IN CONTRACT	VB	VAPOR BARRIER
EMER	EMERGENCY	NO / #	NUMBER	VERT	VERTICAL
EN	EDGE NAIL	NOM	NOMINAL	VEST	VESTIBULE
ENG	ENGINEER	NTS	NOT TO SCALE	VGDF	VERTICAL GRAIN DOUGLAS FIR
EQ	EQUAL(LY)	OC	ON CENTER	VIF	VERIFY IN FIELD
EQPT	EQUIPMENT	OD	OUTSIDE DIAMETER	VNR	VENEER
EQUIP	EQUIPMENT	OFCI	OWNER FURNISHED CONTRACTOR INSTALLED	VOL	VOLUME
EST	ESTIMATE	OPG / OPNG	OPENING	VTR	VENT THRU ROOF
EXIST	EXISTING	OZ	OUNCE	W	WEST
EXP	EXPANSION	P	PAINT (NUMBER - SEE SPECS)	WI	WITH
EXT	EXTERIOR	PED	PEDESTAL	W/O	WITHOUT
FAST	FASTEN(ER)	PER	PERIMETER	WC	WATER CLOSET
FAU	FORCED AIR UNIT	PERF	PERFORATED	WD	WOOD
FBO	FURNISHED BY OWNER	PERP	PERPENDICULAR	WF	WIDE FLANGE
FCO	FLOOR CLEAN OUT	PL	PROPERTY LINE	WH	WATER HEATER
FD	FLOOR DRAIN	PLAS	PLASTER	WI	WROUGHT IRON
FF	FINISHED FLOOR	PLYWD	PLYWOOD	WIN	WINDOW
FG	FINISHED GRADE	POC	POINT OF CONNECTION	WP	WATERPROOF(ING)
FH	FLAT HEAD	PR	PAIR	WPT	WORK POINT
FIN	FINISH(ED)	PRCST	PRE-CAST	WWF	WELDED WIRE FABRIC
FIXT	FIXTURE	PREFA B	PREFABRICATED	YD	YARD
		PROP	PROPERTY		

PROJECT DATA

PROJECT ADDRESS
123 SCHONSETT ST
PARCEL ID NUMBER (PIN): 102B157 89
LOT AREA: 32,908.7 S.F.
ASSESSOR PARCEL NO. (APN): 421100932
TRACT: TR 27432
MAP REFERENCE: M B 171-21/34
BLOCK: NONE
LOT: 32
ARB: NONE
MAP SHEET: 142B482

LEGAL DESCRIPTION
LOT(S) 17 AND 18 OF TRACT NO. 27472, IN THE CITY OF CHICAGO, COUNTY OF CHICAGO, STATE OF ILLINOIS, AS PER MAP RECORDED IN BOOK 171 PAGE(S) 21 AND 34 OF MAPS, IN THE OFFICE OF THE COUNTY RECORDER OF SAID COUNTY.

EXCEPTING THEREFROM ALL OIL, GAS, MINERALS, AND OTHER HYDROCARBON SUB STANCES IN AND UNDER SAID LAND BELOW A DEPTH OF 500 FEET FROM THE SURFACE THEREOF, WITHOUT RIGHT OF SURFACE ENTRY FOR THE DEVELOPMENT OR EXPLORATION THEREOF AS RESERVED IN DEED RECORDED AUGUST 19, 1968, A INSTRUMENT NO. 676.

JURISDICTIONAL
COMMUNITY PLAN AREA: MIRACLE MILE
AREA PLANNING COMMISSION: CHICAGO DOWNTOWN
NEIGHBORHOOD COUNCIL: CHICAGO

PLANNING & ZONING INFORMATION
ZONE: M2- 1
GENERAL PLAN LAND USE: LIGHT MANUFACTURING
HILLSIDE AREA: NO
BASELINE HILLSIDE ORDINANCE: NO
BASELINE MANSIONIZATION ORDINANCE: NO
SPECIFIC PLAN AREA: LOS ANGELES COASTAL TRANSPORTATION CORRIDOR
HISTORIC PRESERVATION REVIEW: NO
PEDESTRIAN ORIENTED DISTRICTS: NONE
CDO - COMMUNITY DESIGN OVERLAY: NONE
NSO - NEIGHBORHOOD STABILIZATION OVERLAY: NONE
STREETSCAPE: NO
SIGN DISTRICT: NO
ADAPTAVE REUSE INCENTIVE AREA: NONE
CRA - COMMUNITY REDEVELOPMENT AGENCY: NONE
BUILDING HEIGHT LIMITATION: NOT RESTRICTED

ADDITIONAL
METHANE HAZARD SITE: METHANE ZONE

VICINITY MAP

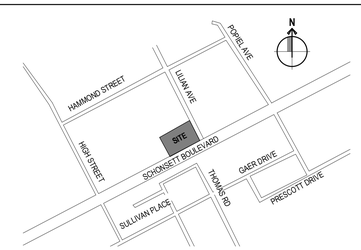

BLUEBEAM®
A NEMETSCHEK COMPANY

CAPTURE ENGINEERS
Mechanical
Electrical
Plumbing

1234 Miller St.
Manchester, NH 06930

REVU ARCHITECTS

5555 N. Broad St
Pasadena CA 91101

OFFICE BUILDING

Project No: 323232

Project Address:
123 Schonsett St
Chicago, IL 60601

THIS DRAWING IS INTENDED FOR DEMONSTRATION PURPOSES ONLY. DO NOT USE THIS DRAWING FOR ANY OTHER PURPOSE WITHOUT THE EXPRESS WRITTEN PERMISSION OF BLUEBEAM, INC.

DATE 03/04/2018
ISSUED FOR: INTERNAL REVIEW

PROJECT 3232
DRAWN BY: Author
CHECKED BY: Checker
APPROVED BY: Approver

#	DATE	DESCRIPTION

NOT FOR CONSTRUCTION

STAMP:

STAMP:

SHEET TITLE & NUMBER
COVER SHEET

G0.00

© 2018 Bluebeam, Inc.